

Servo amplifier

mcDSA-E67-PROFINET

Article number: 1515612



Picture similar

Technical data

Supply voltages	
Electronic supply voltage Ue*1	9..30 V
Electronic current consumption@ Ue=24V*2	typ. 65 mA
Power supply voltage Up*3	9..60 V
Output current	
Max. output current	15 A
Continuous output current @ Up=24V*4	5 A
Continuous output current @ Up=48V*4	4.3 A
PWM	
Output voltage	100% Up
PWM frequency	25, 32*5, 50 kHz
Mechanical	
Size LxWxH	74 x 45 x 38 mm
Weight	60 g
Environment	
Protection class	IP20
Ambient temperature (operation)	-25..70 °C
Ambient temperature (storage)	-25..85 °C
Rel. humidity (non-condensing)	5..90 %
CAN bus	
Protocol	DS301
Device profile	DS402
Max. baudrate	1 Mbit/s
CAN specification	2.0B
Galvanically isolated	no
PROFINET	
Type	Slave
Physical layer	100 Base-Tx
Max. baudrate	100 Mbit/s
Number of ports	2xRJ45 (PORT1, PORT2)

Sensor supply (Encoder)	
Output voltage	5 V
Max. output current	0.2 A
Encoder	
Type	sin / cos
Signals	+Sin,-Sin,+Cos,-Cos
Resolution	13 bit per sine period
Input voltage	1 V peak-peak, differential
Signal type	sine/cosine, analog, differential
Digital inputs	
Number (+/-30V tolerant)	2 (Din0..1)
Number (0..30V tolerant)	1 (Din2)
Low voltage	0..5 V
High voltage	8..30 V
Notice	Din2 parallel with Dout0*6
Digital outputs	
Number	1 (Dout0)
Continuous output current	1.5 A
Load	resistive, inductive
Output voltage	Electronic supply voltage Ue
Signal type	positive switching
Notice	Dout0 parallel with Din2
Analog inputs	
Number	1 (Ain0)
Signal type	+/- 10 V, 12 Bit, single ended

*1 No reverse polarity protection, the destruction limit is at overvoltage of $\geq 33V$ or short-term peak voltage of $37V < 1s$

*2 power amplifier switched off, 5V output (sensor supply) is free, bus not connected

*3 No reverse polarity protection, the destruction limit is at overvoltage of $\geq 80V$ *4 connector cable with max. possible cable cross-section, PWM frequency 32 kHz, ambient temperature 40 °C ($t > 40$ °C derating), RMS current: 5 A $\rightarrow$ 4.1 Aeff, 4.3A $\rightarrow$ 3.5 Aeff

no guarantee, since value is determined empirical, please consider the application notes to determine the continuous current

*5 default value

*6 Input voltage must not exceed Electronic supply voltage Ue

Additional technical data are available in mcManual.



miControl® GmbH


Chausseestraße 34

14979 Großbeeren (bei Berlin)

Copyright 2024 by miControl® - Modifications and errors excepted
mcDSA-E67-PROFINET - PV1.13.00.00 / DV1.00.00.02

Web: www.miControl.de e-mail: info@miControl.de Tel.: +49 (3379) 312 59-0 Fax: +49 (3379) 312 59-19

Scheme

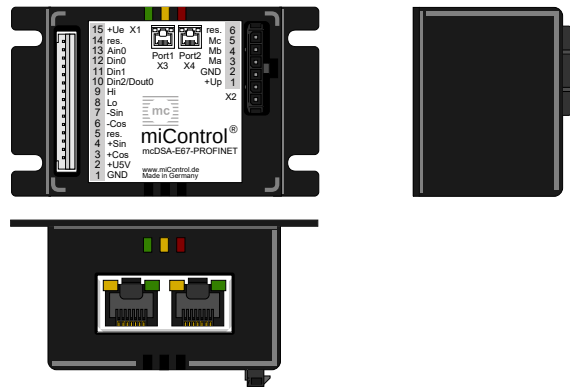

©2023 by miControl

Terminal assignment

X1 Encoder, I/O's and CAN		
1	GND	Ground for sensor supply Notice: don't connect with system GND
2	+U5V	5V output voltage for sensor supply Sensors: encoder
3	+Cos	Encoder, plus cosine signal
4	+Sin	Encoder, plus sine signal
5	res.	Reserved
6	-Cos	Encoder, minus cosine signal
7	-Sin	Encoder, minus sine signal
8	CAN Lo	CAN Low
9	CAN Hi	CAN High
10	Din2/Dout0	Digital input 2 / Digital output 0
11	Din1	Digital input 1
12	Din0	Digital input 0
13	Ain0	Analog input 0
14	res.	Reserved
15	+Ue	Electronic supply voltage
X2 Motor		
1	+Up	Power supply voltage
2	GND	Ground for power supply voltage
3	Ma	Motor phase A
4	Mb	Motor phase B
5	Mc	Motor phase C
6	res.	Reserved
X3 PROFINET - PORT1		
-	PORT1	PORT1
X4 PROFINET - PORT2		
-	PORT2	PORT2