

Servo amplifier

mcDSA-F55

Article number: 1513869



Certification: E475093 *1


Picture similar

Technical data

Absolute maximum rating (destruction limits)		Sensor supply (Encoder/Hall)		
Power supply voltage Up no polarity reversal protection	70 V	Output voltage	5 V	
Continuous Electronic supply voltage Ue no polarity reversal protection	33 V	Max. output current	0.2 A	
Short term peak voltage < 1s Ue no polarity reversal protection	37 V	Incremental encoder		
Power			Type	
Electronic supply voltage Ue	9..30 V	incremental	Signals	
Electronic current consumption@ Ue=24V*2	typ. 60 mA	A,/A,B,/B,Inx	Max. frequency (per channel)	
Power supply voltage Up	9..60 V	500 kHz	Input voltage (24V tolerant)	
Max. output current	50 A	0..5 V	Signal type	
Continuous output current @ Up=24V*3	14.5 A	differential, open collector, single ended	Hall sensors	
Continuous output current @ Up=48V*4	13 A	H1,H2,H3	Signals	
Continuous output current (certified UL)*5 @Up=24V	9.5 A	10 kHz	Max. frequency (per channel)	
@Up=60V	9.0 A	0.5 V	Input voltage	
PWM			Signal type	
PWM frequency	32 kHz	open collector, single ended	Digital inputs	
Mechanical			Number - digital inputs	
Size LxWxH	78 x 74 x 29 mm	7 (Din0..6)	Number - hardware enable inputs	
Weight	95 g	2 (EN-A..B)	Low voltage	
Environment			High voltage	
Protection class	IP20	0.5 V	Digital outputs	
Ambient temperature (operation) (certified UL)	-40..40 °C	8..30 V	Number	
Ambient temperature (operation) (not certified)	-40..70 °C	0.3 A	Continuous output current (certified UL)	
Ambient temperature (storage)	-40..85 °C	resistive, inductive	Load	
Rel. humidity (non-condensing)	5..90 %	Electronic supply voltage Ue	Output voltage	
CAN bus			Signal type	
Protocol	DS301	positive switching	Analog inputs	
Device profile	DS402	Number		
Max. baudrate	1 Mbit/s	3 (Ain0..2)	Signal type - Ain0..1	
CAN specification	2.0B	+/- 10 V, 12 Bit, differential	Signal type - Ain2 / PT1000	
Galvanically isolated	yes	0..5 V, 12 Bit, single ended / PT1000		

*1 The certified performance data must be observed (see UL Instruction Note)

*2 power amplifier switched off, 5V output (sensor supply) is free

*3 connector cable with max. possible cable cross-section, PWM frequency 32 kHz, ambient temperature 40 °C (t >40 °C derating), RMS current: 14.5 A → 10.3 Aeff no guarantee, since value is determined empirical, please consider the application notes to determine the continuous current

*4 connector cable with max. possible cable cross-section, PWM frequency 32 kHz, ambient temperature 40 °C (t >40 °C derating), RMS current: 13 A → 9.2 Aeff no guarantee, since value is determined empirical, please consider the application notes to determine the continuous current

*5 connector cable with max. possible cable cross-section, PWM frequency 32 kHz (SVPWM), ambient temperature 40 °C, I/O's and 5V output active, RMS current: 9.5 A → 6.7 Aeff, 9.0 A → 6.4 Aeff

Additional technical data are available in mcManual.




miControl® GmbH

Chausseestraße 34

14979 Großbeeren (bei Berlin)

Copyright 2023 by miControl® - Modifications and errors excepted
 mcDSA-F55 - PV1.11.00.00 / DV1.00.00.02
 Web: www.miControl.de e-mail: info@miControl.de Tel.: +49 (3379) 312 59-0 Fax: +49 (3379) 312 59-19

Scheme

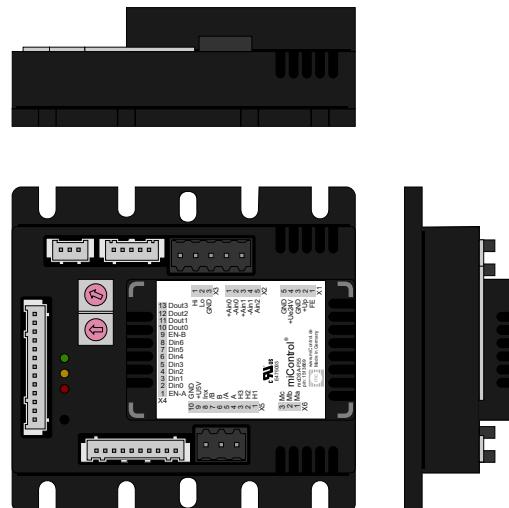

©2023 by miControl

Terminal assignment

X1 Supply		
1	FE	Functional earth
2	+Up	Power supply voltage
3	GND	Ground for power supply voltage
4	+Ue24V	Electronic supply voltage
5	GND	Ground for electronic supply voltage

X2 Analog inputs		
1	+Ain0	Analog input 0, plus
2	-Ain0	Analog input 0, minus
3	+Ain1	Analog input 1, plus
4	-Ain1	Analog input 1, minus
5	Ain2	Analog Input 2 (5V) / PT1000

X3 CAN bus		
1	CAN Hi	CAN High
2	CAN Lo	CAN Low
3	CAN GND	CAN Ground

X4 Digital inputs/outputs		
1	EN-A	Hardware enable channel A
2	Din0	Digital input 0
3	Din1	Digital input 1
4	Din2	Digital input 2
5	Din3	Digital input 3
6	Din4	Digital input 4
7	Din5	Digital input 5
8	Din6	Digital input 6
9	EN-B	Hardware enable channel B
10	Dout0	Digital output 0
11	Dout1	Digital output 1
12	Dout2	Digital output 2
13	Dout3	Digital output 3

X5 Hall and inc. encoder		
1	H1	Hall sensor 1
2	H2	Hall sensor 2
3	H3	Hall sensor 3
4	A	Inc. encoder, A channel
5	/A	Inc. encoder, A channel inverted
6	B	Inc. encoder, B channel
7	/B	Inc. encoder, B channel inverted
8	Inx	Inc. encoder, index channel
9	+U5V	5V output voltage for sensor supply Sensors: encoder, hall
10	GND	Ground for sensor supply Notice: don't connect with system GND

X6 Motor		
1	Ma	Motor phase A
2	Mb	Motor phase B
3	Mc	Motor phase C