


Servo amplifier

mcDSA-S60-Lp

Article number: 1504913

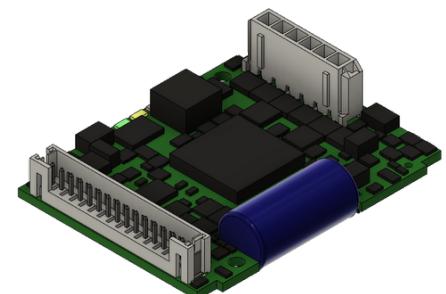

Picture similar

Technical data

Absolute maximum rating (destruction limits)		Auxiliary voltage
Power supply voltage Up no polarity reversal protection	80 V	Output voltage 5 V
Continuous Electronic supply voltage Ue no polarity reversal protection	33 V	Max. output current 0.2 A
Short term peak voltage < 1s Ue no polarity reversal protection	37 V	Digital inputs
Power		Number - digital inputs 3 (Din0..2)
Electronic supply voltage Ue	9..30 V	Low voltage 0.5 V
Electronic current consumption@ Ue=24V*1	typ. 30 mA	High voltage 8..30 V
Power supply voltage Up	9..60 V	Analog inputs
Max. output current	10 A	Number 1 (Ain0)
Continuous output current @ Up=24V*2	3.5 A	Signal type 0..10 V, 12 Bit, single ended
Continuous output current @ Up=48V*3	3 A	
PWM		
Output voltage	85% Up	
PWM frequency	32 kHz	
Mechanical		
Size LxWxH	53 x 41 x 13 mm	
Weight	18 g	
Environment		
Protection class	IP00	
Ambient temperature (operation)	-25..70 °C	
Ambient temperature (storage)	-25..85 °C	
Rel. humidity (non-condensing)	5..90 %	
CAN bus		
Protocol	DS301	
Device profile	DS402	
Max. baudrate	1 Mbit/s	
CAN specification	2.0B	
Galvanically isolated	no	

*1 power amplifier switched off, 5V output (sensor supply) is free

*2 connector cable with max. possible cable cross-section, PWM frequency 32 kHz, ambient temperature 40 °C ($t > 40$ °C derating), RMS current: 3.5 A → 2.9 Aeff, 3 A → 2.4 Aeff


no guarantee, since value is determined empirical, please consider the application notes to determine the continuous current

*3 connector cable with max. possible cable cross-section, PWM frequency 32 kHz, ambient temperature 40 °C ($t > 40$ °C derating), RMS current: 3.3 A → 2.9 Aeff, 3 A → 2.4 Aeff

no guarantee, since value is determined empirical, please consider the application notes to determine the continuous current

Additional technical data are available in mcManual.

Scheme

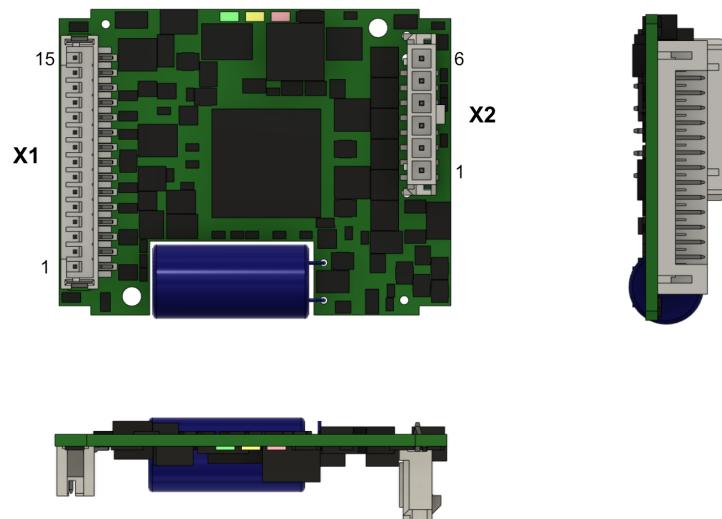

Terminal assignment

X1	I/O's and CAN	
1	GND	Ground of the auxiliary voltage Notice: don't connect with system GND
2	+U5V	5V output voltage (auxiliary voltage)
3	res.	Reserved
4	res.	Reserved
5	res.	Reserved
6	res.	Reserved
7	res.	Reserved
8	CAN Lo	CAN Low
9	CAN Hi	CAN High
10	Din2	Digital input 2
11	Din1	Digital input 1
12	Din0	Digital input 0
13	Ain0	Analog input 0
14	GND	Ground for electronic supply voltage
15	+Ue	Electronic supply voltage
X2 Motor		
1	+Up	Power supply voltage
2	GND	Ground for power supply voltage
3	Ma	Motor phase A
4	Mb	Motor phase B
5	Mc	Motor phase C
6	Md	Motor phase D